

FLOW SIGHT GLASS GAUGE

- FW-1** – SINGLE WINDOW
- FW-2** – DOUBLE WINDOW
- FW-3** – FLANGE TYPE FOR BIG SIZE

Technical Data

Service: For gases and liquid
Wetted Parts Material: Window- Tempered glass; Body- SS316, SS304, SS316L; Gasket- Teflon; Impeller- (1) ABS plastic, (2) PVDF, (3) PPS+40% glass fiber
Temperature Limit: For impeller- (1) ABS plastic: 70°C (White), (2) PVDF: 100°C (Red or White), (3) PPS+40% glass fiber: 200°C (Dark Brown)
Pressure Limit: FW-1: 150 psig (10.34 bar)
 FW-2: 125 psig (8.62 bar)
 FW-3: Available for 15, 25 and 40 kg/cm² @25°C Water
Connection: Threaded and Flange available
Size: (FW-1 & FW-2): 1/4", 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"
 Thread NPT or PF female; and Flange type available
 (FW-3): 2" to 8" Flange type only



FW-1
(Single Window)

Approvals:

FW-2
(Double Window)




FW-3
(Flange, Double Window)


Dimension-mm

FW-1

Single Window, Thread type & Flange type

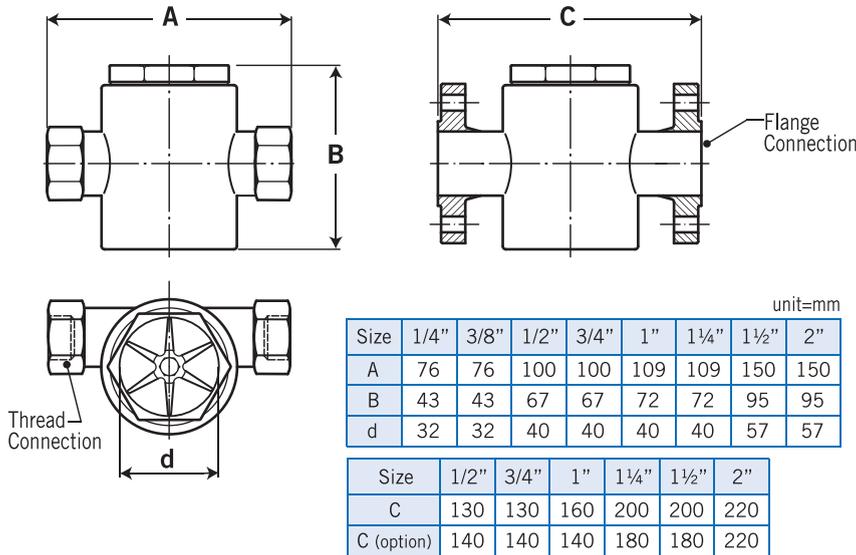

Flow Direction

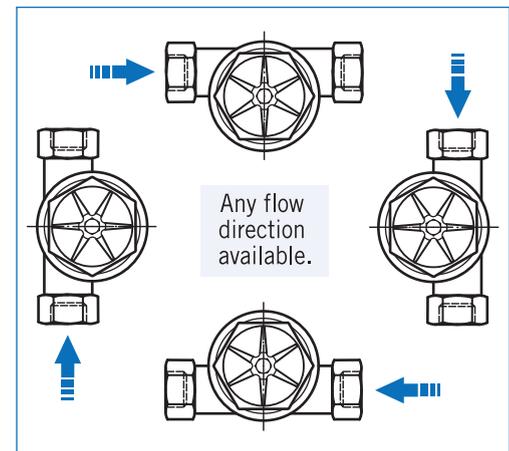

FW-2

Double Window, Thread type & Flange type

